

MORE LOUDER


Internal Jumper Positions



Tools Required:

- Philips head screwdriver, to remove the More Louder back plate
- Needle nose pliers, to gently remove and replace the jumper

Jumper OUT: -5 to +15db gain. It is only connected to ONE post. You can also remove the jumper altogether (but don't lose it!).

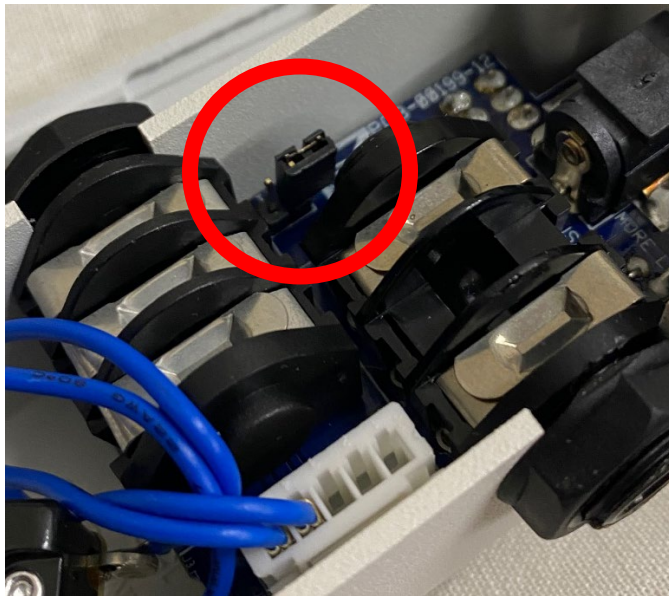

Jumper IN: 0 to +25db gain. The jumper is connected to both posts.

